



Network Video Recorder

NVR202-16EP



Key Feature

- 16 Channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Up to 4 Megapixels resolution recording
- Accurate retrieval, instant playback
- 2 SATA HDD up to 12TB
- Plug & Play with 8 independent PoE network interfaces
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access



Specifications NVR202-16EP

Video and Audio

IP Video Input	16-ch
Two-way audio Input	1-ch, RCA

Network

Incoming bandwidth	160Mbps
Outgoing bandwidth	96Mbps
Remote connection	128

Video/Audio Output

HDMI/VGA Output	HDMI/VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch

Decoding

Compression	H.264
Live view/Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	4 x 4MP @20, 6 x 1080p@25, 16 x 720p@25

Hard Disk

SATA	2 SATA interface
Capacity	Up to 6TB for each disk

External Interface

Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
Network Function	HTTP, TCP/IP, IPv4, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, IP Server, P2P
USB Interface	Rear Panel: 1 x USB 2.0, 1 x USB 3.0


PoE

Interface	8 Independent 100 Mbps PoE network interfaces
Supported Standard	IEEE 802.3 at

General

Power Supply	52V DC
Consumption(without HDD and PoE)	≤8 W
Working Temperature	-10°C ~ +55°C (+14°F ~ +131°F)
Dimensions (Ø x H)	10% ~ 90%
Weight	44 × 360 × 254mm (1.7" × 14.2" × 10.0")
Working Environment	≤1.47 Kg (3.24 lb)

Dimensions

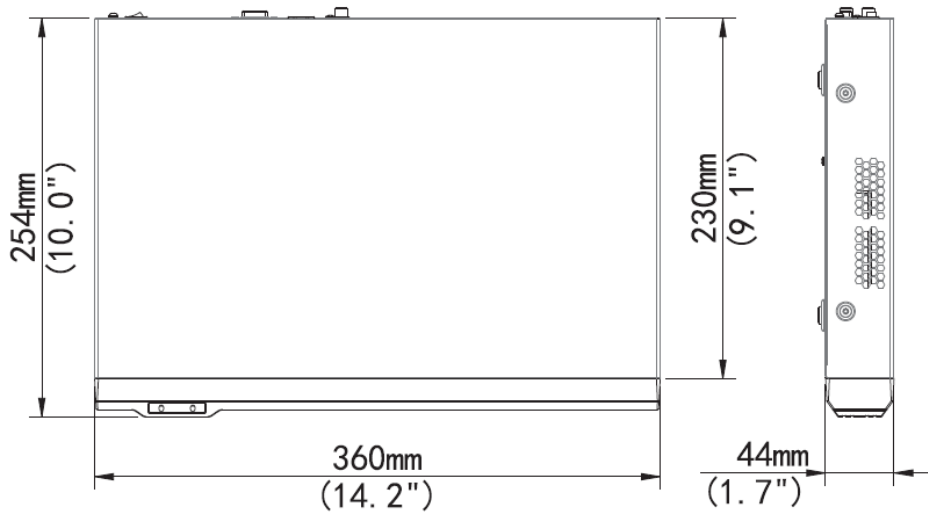

Rear Panel

