



# Network Video Recorder

## NVR201-04LP



### Key Feature

- 4 Channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Up to 4 Megapixels resolution recording
- Accurate retrieval, instant playback
- 1 SATA HDD up to 6TB
- Plug & Play with 4 independent PoE network interfaces
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access



# Specifications NVR201-04LP

## Video and Audio

IP Video Input	4-ch
Two-way audio Input	1-ch, RCA

## Network

Incoming bandwidth	40Mbps
Outgoing bandwidth	96Mbps
Remote connection	128

## Video/Audio Output

HDMI/VGA Output	HDMI/VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	4-ch

## Decoding

Compression	H.264
Live view/Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	2 x 4MP @20, 4 x 1080p@30

## Hard Disk

SATA	1 SATA interface
Capacity	Up to 6TB for each disk

## External Interface

Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
Network Function	HTTP, TCP/IP, IPv4, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, IP Server, P2P
USB Interface	Rear Panel: 1 x USB 2.0, 1 x USB 3.0


## PoE

Interface	4 Independent 100 Mbps PoE network interfaces
Supported Standard	IEEE 802.3 at

## General

Power Supply	48V DC
Consumption(without HDD and PoE)	≤8 W
Working Temperature	-10°C ~ +55°C ( +14°F ~ +131°F )
Dimensions (Ø x H)	10% ~ 90%
Weight	205 × 205 × 42mm ( 8.1" × 8.1" × 1.7" )
Working Environment	≤0.58 Kg ( 1.27 lb )

# Dimensions

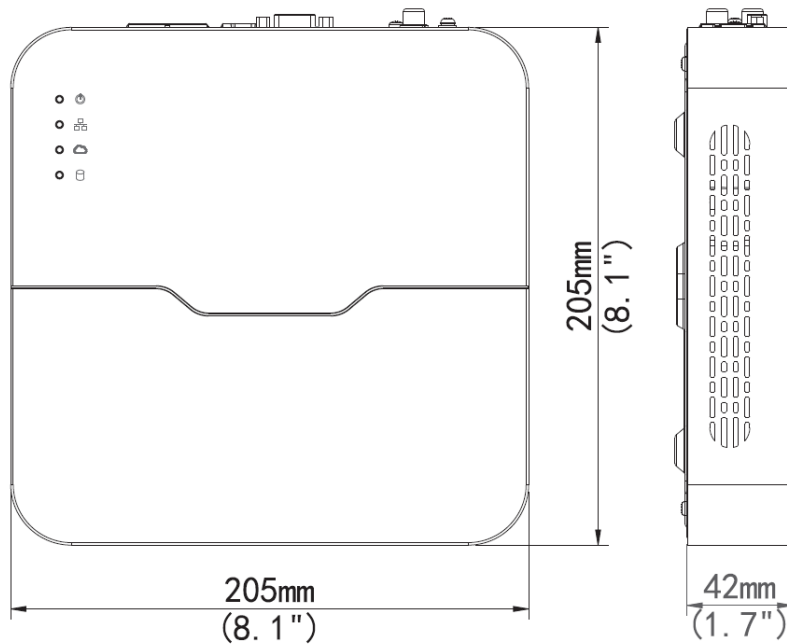

# Rear Panel

